

Littlite®

Gooseneck Lamps & Accessories

Littlite LLC PO Box 430/10087 Industrial Drive Hamburg MI 48139-0430 USA
Phone 810-852-4242 Fax 810-231-1631

October 2014

MIDAS® M-32 XLR PIN CONFIGURATION

The XLR task light connector on the rear panel of the Midas M-32 digital console is rotated 180 degrees from the standard orientation. A regular four-pin, right angle Littlite requires a simple modification in order to work correctly with this console.

Our LLX XLR connector enables the pin insert to be rotated allowing the gooseneck to bend and clear the top lip. The following instructions detail how to reorient the pin inserts.

We recommend our 18XR-HI-4 or 18XR-4-LED lights for the Midas M-32 Series.



M-32 Back Panel Section

Our standard 4-pin XLR configuration positions the gooseneck at the top of the arc created by the four pins. **(Figure 1)**



Figure 1

Remove the small set screw on the outside of the LLX barrel **(Figure 2)** and pull out the pin insert. Be careful not to break the wires or lose the small hex nut inserted in the pin insert disk. **(Figure 3)**



Figure 2

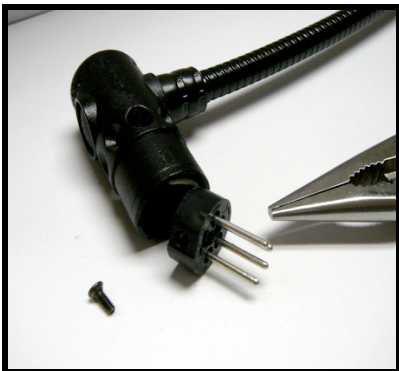


Figure 3

Turn the pin insert 180 degrees and reinstall the set screw. Be careful not to pinch the wires.
(Figure 4)



Figure 4

There will still be enough space between the gooseneck and the release tab on the XLR panel socket to disengage the light for transport.

If you have questions regard this process, please contact the factory at (810) 852-4242 or info@littlite.com.

www.littlite.com

Disclaimer: All trademarks are registered trademarks of their respective owners. Their use neither constitutes a claim of the trademark by Littlite, LLC nor affiliation of the trademark owners with Littlite, LLC.