




Littlite LLC PO Box 430/10087 Industrial Drive Hamburg MI 48139-0430 USA
Phone 810-852-4242 Fax 810-231-1631

Reorienting Pin Inserts on the Littlite LLX XLR connector

Littlite XR-LED series console light are configured for the standard XLR panel socket orientation used on the back panel of most audio consoles. This orientation positions the release tab on the bottom edge of the XLR panel socket.

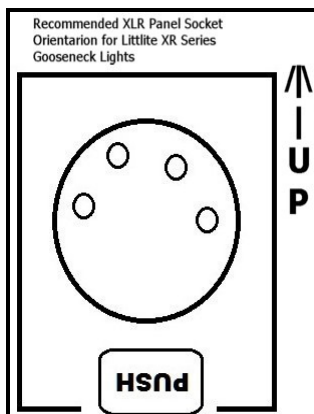


Some applications might require the pin inserts in the XLR connector to be rotated to a different position. The Littlite LLX was designed with that in mind and here is the easy process. You'll need a Phillips head screws driver and a pair of needle-nose pliers.

Our standard 4-pin XLR configuration positions the gooseneck at the top of the arc created by the four pins.



Remove the small set screw on the outside of the LLX barrel and pull out the pin insert. Be careful not to break the wires or lose the small hex nut inserted in the pin insert disk.

The Professional, Versatile, Flexible, Durable, Gooseneck Task Light System

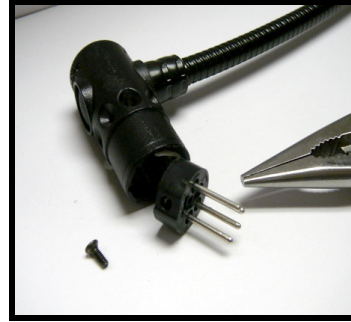

Carefully turn the pin insert to the desired location, line up the receiving nut in the pin insert with a hole in the LLX and reinstall the set screw. Be careful not to pinch the wires.



Figure 4



Figure 5

If you have questions regard this process, please contact the factory at (810) 852-4242 or info@littlite.com.